ศิรคา สมอหมอบ : การพัฒนาการก่อรูปลำกลื่นเชิงพิกัคแบบคงที่สำหรับเครือข่ายเฮทเน็ต (DEVELOPMENT OF FIXED COORDINATED BEAMFORMING FOR HETNET) อาจารย์ที่ปรึกษา : รองศาสตราจารย์ คร.มนต์ทิพย์ภา อุฑารสกุล, 72 หน้า.

ในยุคปัจจุบันการใช้งานโทรศัพท์เคลื่อนที่ (mobile station) มีความสำคัญต่อชีวิตประจำวัน เพิ่มมากขึ้น ไม่ว่าจะเป็นการโทร การส่งข้อความ รวมทั้งการใช้งานแอพพลิเคชั่นเพื่อความบันเทิง ต่างๆ เช่น เกมออนไลน์ ฟังเพลง วิดีโอสตรีมมิ่ง สิ่งเหล่านี้ส่งผลให้เซลล์ขนาดใหญ่ไม่สามารถ รองรับการใช้งานของผู้ใช้ได้อย่างเพียงพอ จึงได้มีการติดตั้งเซลล์ขนาดเล็กเพิ่มเข้ามาในพื้นที่ ครอบคลุมของเซลล์ขนาดใหญ่ สำหรับในบางพื้นที่ที่มีผู้ใช้งานจำนวนมาก รวมทั้งพื้นที่ที่เป็นจุด อับสัญญาณ เช่น บริเวณตัวเมืองที่มีผู้คนอาศัยอยู่เป็นจำนวนมาก เพื่อเป็นการรองรับปริมาณข้อมูล ที่เพิ่มมากขึ้นและรองรับพื้นที่บางจุดที่ได้รับสัญญาณต่ำ ซึ่งเราเรียกเครือข่ายแบบนี้ว่า เครือข่ายเฮท เน็ต (Heterogeneous Network : HetNet) นอกจากประโยชน์ของเครือข่ายเฮทเน็ตที่ได้กล่าวมาแล้ว นั้น ยังมีผลกระทบกำลังส่งที่ไม่เท่ากันของสถานีฐาน เนื่องจากเครือข่ายเฮทเน็ตประกอบด้วยสถานีฐานหลายชนิดแตกต่างกัน ซึ่งส่งผลให้ผู้ใช้แต่ละคนได้รับค่าสัญญาณต่อสัญญาณแทรกสอดและ สัญญาณรบกวนที่ไม่เท่าเทียมกัน

จากการสำรวจปริทัศน์วรรณกรรมพบว่าหลายงานวิจัยได้เสนอแนวทางในการแก้ไขปัญหา ซึ่งหนึ่งในวิธีการที่ได้รับความสนใจคือ วิธีการก่อรูปลำกลื่นเชิงพิกัด (coordinated beamforming) ซึ่งเป็นวิธีการที่ต่อยอดมาจากวิธีการก่อรูปลำกลื่นโดยวิธีการนี้สถานีฐานจะมีการแลกเปลี่ยนข้อมูล ของผู้ใช้ เมื่อมีการก่อรูปลำกลื่นไปยังผู้ใช้ที่ต้องการจะมีความแม่นยำมากขึ้น ดังนั้นงานวิจัยนี้จึงได้ เลือกใช้วิธีการก่อรูปลำกลื่นเชิงพิกัด ที่มีการกำหนดค่าถ่วงน้ำหนักไว้ก่อนซึ่งในงานวิจัยนี้จะ เรียกว่าวิธีการนี้ว่า การก่อรูปลำกลื่นเชิงพิกัดแบบคงที่ (fixed-coordinated beamforming) เพื่อเป็น การปรับปรุงค่าสัญญาณต่อสัญญาณแทรกสอดและสัญญาณรบกวนของผู้ใช้ในสถานีฐานพิโค (pico base station) ให้คีขึ้นนั้น โดยการกำหนดค่าจุดเริ่มเปลี่ยน (threshold) ของค่าสัญญาณต่อสัญญาณแทรกสอดและสัญญาณรบกวนสำหรับผู้ใช้ในสถานีฐานมาโคร ให้เป็นเงื่อนไขในการเลือกก่าถ่วงน้ำหนัก โดยสิ่งที่มุ่งหวังสำหรับงานวิจัยนี้คือสามารถหาค่าถ่วงน้ำหนักที่เหมาะสมซึ่ง ช่วยปรับปรุงค่าอัตราสัญญาณต่อสัญญาณแทรกสอดและสัญญาณรบกวนของผู้ใช้แต่ละคนให้มีค่า เท่าเทียมกันได้

สาขาวิชา<u>วิศวกรรมโทรคมนาคม</u> ปีการศึกษา 2560 ลายมือชื่อนักศึกษา 🚣 🖘 🚕 🗫 🖎


SIRADA SAMOMOB: DEVELOPMENT OF FIXED COORDINATED BEAMFORMING FOR HETNET. THESIS ADVISOR: ASSOC. PROF. MONTHIPPA UTHANSAKUL, Ph.D., 72 PP.

COORDINATED BEAMFORMING/HETNETS/FAIENESS/SINR

Currently, mobile phones are increasingly used in daily lives. For example, it uses for a calling, sending message and entertainment such as online games, music streaming and video streaming. These applications require a huge data bandwidth. In some situations, a base station cannot support the sufficient bandwidth. According to the mentioned problem, the Heterogeneous Networks (HetNets) which deploy small cells into a large cell's coverage area are considered. This network can provide a higher data bandwidth in the city and poor signal area. The concept of HetNets is applying the different base stations for improving the performance of wireless network. In addition, HetNets are flexible and low cost for installation because small cells are installed in urban area in which there are many people and limited space so the large cell cannot be installed. As the benefit of HetNets is mentioned above, an inequality occurs as a result of the different level of transmission power leads to a poor SINR of users in the small base stations.

From literatures, there are lots of solving this problem. The one of these techniques is coordinated beamforming in which develop from a beamforming. In this method, a base station requires the knowledge of all user's location in the networks. Then, a base station provides the higher performance of beamforming since each base station selects a suitable weight for its user. Therefore, this paper uses the predefined weights method for coordinated beamforming and we call fixed coordinated

beamforming for selects the suitable weights for all users in HetNet. The predefined threshold of the SINR at macro-user is proposed in this research work to improve the SINR at pico-user. This is for the fairness of pico-user.

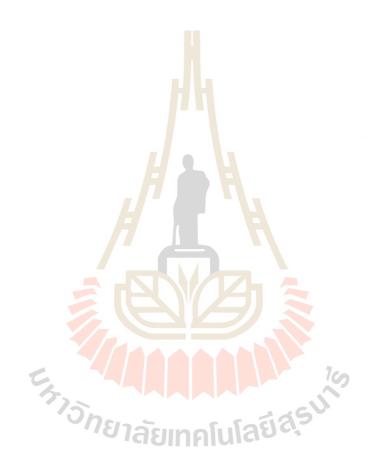

School of Telecommunication Engineering

Academic Year 2017

Student's Signature

Advisor's Signature_